



CoatOSil* 1770

CoatOSil* 1770

Description

An improved combination of performance, appearance and handling characteristics may be possible in waterborne coatings formulated with CoatOSil 1770 silane. Shelf stable, one-pack and two-pack systems are possible. When properly formulated, crosslinking can occur under both room temperature and elevated temperature conditions.

Key Features and Benefits

Performance Benefits

Incorporation of CoatOSil 1770 silane into waterborne coating formulations gives excellent coating properties in terms of appearance, weathering and durability:

- Improved solvent, impact and mar resistance
- Superior wet and dry adhesion
- Improved stain resistance in wood and automotive plastic coatings
- No negative affect on clarity or color of the cured film
- Excellent gloss retention upon aging

Handling Benefits

CoatOSil 1770 silane provides a range of handling characteristics that are necessary for shelf stability:

- Stability over 18 months in a fully formulated coating (one pack system)
- Stability of over 12 months for a 40% emulsion (for a two pack system)
- Stability superior to crosslinkers such as polyaziridines, melamines, isocyanates

Shelf stability of a one pack system will be reduced by increased (>5% on resin solids) addition levels of CoatOSil 1770 silane, or by pH outside the range of 6-8.5. Please contact your Momentive Performance Materials representative for answers to any questions you have regarding shelf stability.


Typical Physical Properties

(Not to be used for specification purposes)

Physical Form	Clear liquid
Color	Clear, pale
Percent Active Material	100
Specific Gravity, 25/25°C	1.00
Boiling Point (°C at 760mm Hg)	> 300
Molecular Weight, g/mole	288.46
Flash Point, Pensky-Martens Closed Cup ⁽¹⁾ , °C (°F)	74 (165)

(1) ASTM Method D93

Chemical Structure

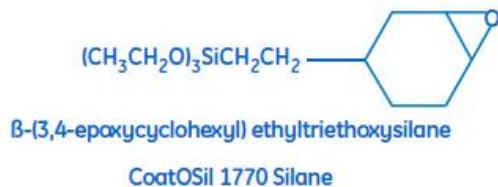

Processing Recommendations

Formulation and Addition - CoatOSil 1770 silane is easily dispersed or emulsified in a coating formulation, providing stability in the formulated coating of over 12 months. This silane compound can be added by two methods:

Direct Addition of the Silane - In many coating formulations, adequate quantities of surfactant or co-solvent are present to stabilize the dispersion of neat CoatOSil 1770 silane. Moderate shear is recommended for dispersion.

Addition of a Silane Emulsion - It is possible to introduce a 40% emulsion of the CoatOSil 1770 silane into the coating formulation at the time of use (two pack system) or during formulation (one pack system). Light to moderate shear will uniformly mix the silane emulsion.

Recommended Use Levels and Applications - Silane addition level, and the acid number of the polymer emulsion, will determine the level of performance. Typical range of addition of CoatOSil 1770 silane will be 0.5-5% of total resin solids.

CoatOSil 1770 silane provides value and performance in a wide range of coating end uses, particularly those with high performance and durability demands such as product finishes, wood coatings, and coatings for exterior use. Additional levels as a percent of resin solids in the formulation are as follow.

Wood Coatings (kitchen cabinets, institutional furniture), %	2
Wood Coatings (floors), %	3
Masonry Coatings, %	2
Metal Coatings for Exterior Uses, %	1
Glass Coatings, %	1.5
Exterior Architectural Coatings, %	1.2
Interior Architectural Coatings, %	0.5
Coatings for leather, vinyl and plastics	2.0

Best results are obtained when CoatOSil 1770 silane is formulated with a waterborne resin with an acid number in the range of 15 to 70. Higher acid number values and silane addition levels are suggested where the highest levels of performance and durability are required.

Momentive Performance Materials recommends that you optimize use level to get the balance of performance and cost which best matches the needs of your customer's end use.

Chemistry of Crosslinking - The mechanism of crosslinking involves the epoxysilane's dual chemical functionality. The epoxy portion of the molecule is reactive with the matrix resin and the alkoxy silane portion crosslinks after hydrolysis by condensation forming siloxane bonds. The alkoxy silane also can react with surfaces to improve wet adhesion of the coating, or with fillers to improve pigment binding.

Patent Status

The use of and compositions containing CoatOSil 1770 silane and related compounds are described and claimed in U.S. Patent No. 5,714,532 and pending patent applications.

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

Product Safety, Handling and Storage

Customers should review the latest Material Safety Data Sheet (MSDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, and any special storage conditions required for safety. MSDS are available at www.momentive.com or, upon request, from any Momentive Performance Materials (MPM) representative. **For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center.** Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

From automotive to healthcare, from electronics to construction, products from Momentive Performance Materials Inc. are practically everywhere you look. We are a global leader in silicones and advanced materials with a 70+ year heritage of innovation and being first to market – with performance applications that improve everyday life. By knowing our customers' needs and creating custom technology platforms for them, we provide science based solutions to help customers increase performance, solve product development issues and engineer better manufacturing processes.

Contact Information

For product prices, availability, or order placement, contact our customer service by visiting www.momentive.com/Contacts

For literature and technical assistance, visit our website at: www.momentive.com

Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.

***CoatOSil is a trademark of Momentive Performance Materials Inc.**

DISCLAIMER

The information provided herein was believed by Momentive Performance Materials Inc. (collectively with its subsidiaries, "Momentive") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product, and to determine the suitability of the product for user's intended application or use. All products supplied by Momentive are subject to Momentive's standard terms and conditions of sale. **MOMENTIVE MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY MOMENTIVE,** except that the product shall conform to Momentive's specifications. Nothing contained herein constitutes an offer for the sale of any products.