

Printing & Packaging

Industrial Coatings

Technical Data Sheet

Tinuvin® 460



Product Description

Tinuvin® 460 is a UV light absorber of the hydroxyphenyl-triazine class. Due to its extremely high extinction, it provides outstanding protection to coatings and light sensitive substrates and materials. It is therefore especially suited for use in silver halide photographic papers or overprint varnishes.

Key Features & Benefits

- Solid hydroxyphenyl-triazine UVA
- Extremely high extinction in the UV-A region enables photoprotection of thin films
- Excellent photopermanence
- Low color

Chemical Composition

Hydroxyphenyl-triazine UV light absorber

Properties

Typical Properties


| | |
|---------------|------------------------|
| Appearance | slightly yellow powder |
| Melting range | 93 – 102 °C |

Solubility at 20 °C (g/100 g solution):

| | |
|----------------------|-------------|
| Butanol | not soluble |
| Ethyl acetate | 3.2 |
| Butyl acetate | 4.3 |
| Ethylglycol | not soluble |
| Methoxypropylacetate | 1.9 |
| Methylethylketone | 5.7 |
| water | < 0.01 |

These typical values should not be interpreted as specifications.

Absorption Spectrum
(10 mg/l in Ethyl Acetate)

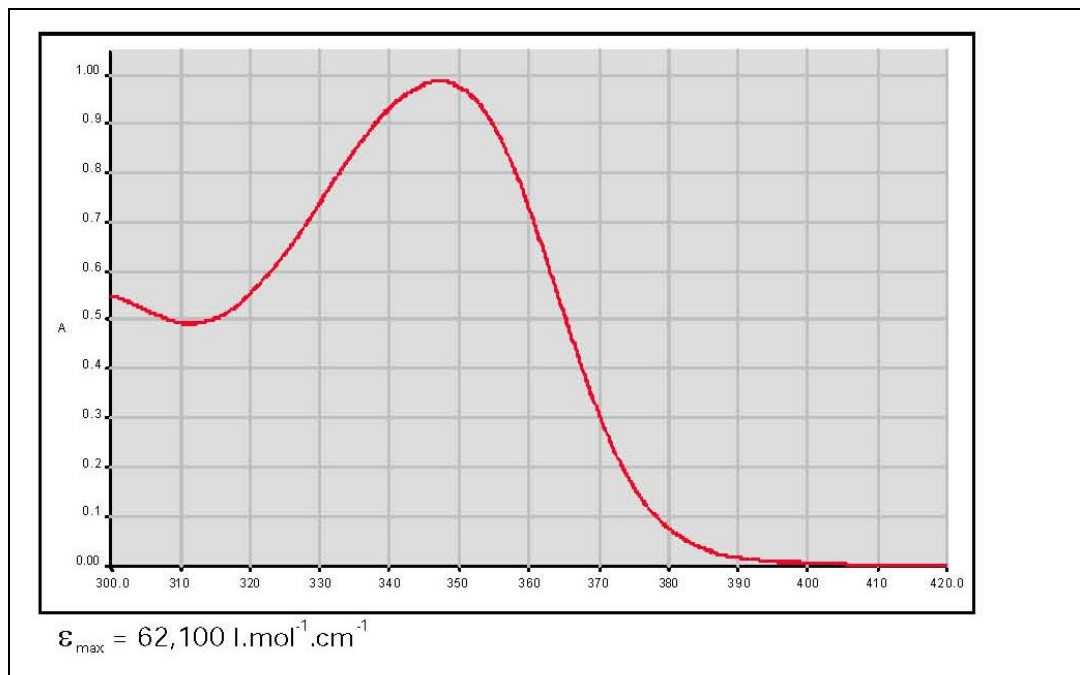

Applications

Tinuvin® 460 is a UV light absorber of the hydroxyphenyl-triazine class. Since its absorption spectrum does not tail significantly into the visible region, it is an ideal UV absorber for those systems where initial yellowing must be kept to a minimum.

Tinuvin® 460 is recommended for use in:

- Silver halide photographic materials such as color negative papers
- Overprint varnishes for commercial, publication, or packaging applications
- Industrial coatings
- Trade sale paints such as wood stains or do-it-yourself paints

In photographic applications, Tinuvin® 460 can be combined with other UV absorbers, such as Tinuvin® 326, to achieve desired absorption characteristics.

In silver halide color negative papers, it is particularly useful for protecting the dyes and couplers from harmful UV light.

The product can also be used in other reprographic applications in which a UV filter is needed e.g. in non-silver imaging color hardcopy.

The amount of TINUVIN 460 required for optimum performance should be determined in trials covering a concentration range.

Recommend Concentrations

0.5 – 3% Tinuvin® 460

+

0.5 – 2.0 % Tinuvin® 123 or Tinuvin® 292

(concentrations are based on weight percent binder solids)

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care and wearing of protective goggles.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet Tinuvin® 460.

Important

While the descriptions, designs, data and information contained herein are presented in good faith and believed to be accurate, they are provided for guidance only. Because many factors may affect processing or application/use, BASF recommends that the reader make tests to determine the suitability of a product for a particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS.** In no case shall the descriptions, information, data or designs provided be considered a part of BASF's terms and conditions of sale. Further, the descriptions, designs, data, and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained all such being given and accepted at the reader's risk.

Tinuvin is a registered trademark of BASF Group.

© BASF Corporation, 2016



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

U.S & Canada

BASF Corporation
24710 W Eleven Mile Road
Southfield, MI 48033
ph: 1(800) 231-7868
fax: 1(800) 392-7429
Email: Custserv_charlotte@basf.com
Email: edtech_info@basf.com
www.basf.us/dpsolutions

Mexico

BASF Mexicana, S.A. de C.V.
Av. Insurgentes Sur # 975
Col. Ciudad de los Deportes
C.P. 03710
Mexico, D.F.
Phone: (52-55) 5325-2756
Fax: (52-55) 5723-3011