

Printing & Packaging

Industrial Coatings

Technical Data Sheet

Tinuvin® 900

BASF
We create chemistry

Product Description


Tinuvin® 900 is a UV absorber of the hydroxyphenyl-benzotriazole class developed specifically for coating systems exposed to high temperatures and/or extreme environmental stresses.

Key Features & Benefits

- Solid hydroxyphenyl-benzotriazole with excellent spectral coverage in UV region
- Excellent thermal and photo-permanence
- Excellent for improving exterior durability of powder & solvent borne coatings

Chemical Structure

Tinuvin® 900 is: 2-(2H-benzotriazol-2-yl)-4, 6-bis (1-methyl-1-phenylethyl)phenol

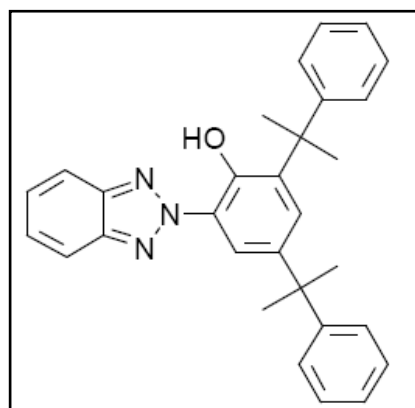

Properties

Typical Properties

CAS No:	70321-86-7
Appearance	slightly yellow powder
Molecular weight	447.6
Melting range	137 – 141°C


Solubility at 20°C (g/100 g solution):

butylcarbitol	0.2
butanol	0.3
butyl acetate	4.5
ethyglycol	1
1-methoxypropylacetate-2	2
methylethylketone	5.5
Solvesso 100 ¹	5
Solvesso 150 ¹	5
xylene	10
water	< 0.01

¹ Registered trademark of Esso

These typical values should not be interpreted as specifications.

Transmittance Spectrum
in toluene, cell thickness = 1 cm

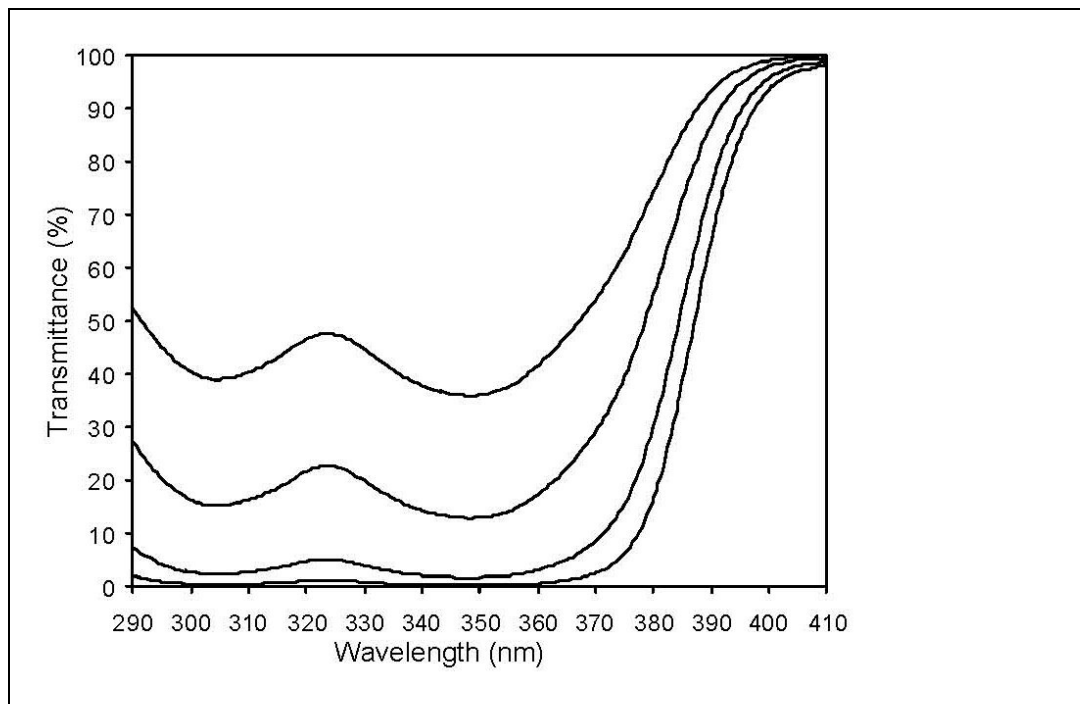

Top Line: 0.001% Tinuvin® 900, corresponds to 0.3% in a 40 µm film
Second Line: 0.002% Tinuvin® 900, corresponds to 0.5% in a 40 µm film
Third Line: 0.004% Tinuvin® 900, corresponds to 1.0% in a 40 µm film
Bottom Line: 0.006% Tinuvin® 900, corresponds to 1.5% in a 40 µm film

Applications

Tinuvin® 900 is recommended for applications such as:

- Solvent borne automotive coatings
- Coil coatings
- Powder coatings

Tinuvin® 900 may be used in combination with a light stabilizer of the sterically hindered amine or aminoether class (HALS) such as recommended below. These combinations give coatings superior protection against gloss reduction, cracking, blistering, delamination, and color change. The light stabilizers may be added in two-coat automotive finishes to the base and clear coat. However, according to our experience the optimum protection is achieved by adding the light stabilizer to the topcoat.

The amount of Tinuvin® 900 required for optimum performance should be determined in trials covering a concentration range.

Recommend Concentrations	1.0 – 3.0%	Tinuvin® 900
	+	
	0.5 – 2.0%	Tinuvin® 144, Tinuvin® 292, or Tinuvin® 123

(concentrations are based on weight percent binder solids)

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State and Local health and safety regulations, thorough ventilation of the workplace, good skin care and wearing of protective goggles.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet Tinuvin® 900.

Important

While the descriptions, designs, data and information contained herein are presented in good faith and believed to be accurate, they are provided for guidance only. Because many factors may affect processing or application/use, BASF recommends that the reader make tests to determine the suitability of a product for a particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS.** In no case shall the descriptions, information, data or designs provided be considered a part of BASF's terms and conditions of sale. Further, the descriptions, designs, data, and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained all such being given and accepted at the reader's risk.

Tinuvin is a registered trademark of BASF Group.

© BASF Corporation, 2016



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

U.S & Canada

BASF Corporation

24710 W Eleven Mile Road

Southfield, MI 48033

ph: 1(800) 231-7868

fax: 1(800) 392-7429

Email: Custserv_charlotte@basf.com

Email: edtech_info@basf.com

www.basf.us/dpsolutions

Mexico

BASF Mexicana, S.A. de C.V.

Av. Insurgentes Sur # 975

Col. Ciudad de los Deportes

C.P. 03710

Mexico, D.F.

Phone: (52-55) 5325-2756

Fax: (52-55) 5723-3011