



# Silquest\* A-1100

## Silquest\* A-1100

### Description

Silquest A-1100 silane, gamma-Aminopropyltrimethoxysilane, a versatile amino-functional coupling agent may be an excellent candidate for use in a range of broad applications to provide superior bonds between inorganic substrates and organic polymers.

### Typical Physical Properties

Physical Form	Liquid
Color	Clear, colorless
Specific Gravity at 25/25°C	0.9500
Boiling Point at 760 mm Hg, °C (°F)	220 (428)
Refractive Index, <sub>n</sub> D 25°C	1.420
Flash Point, Pensky-Martens Closed Cup <sup>(1)</sup> , °C (°F)	96 (205)

(1) ASTM Method D 93

### Chemical Structure

The silicon-containing portion of the molecule can help provide strong bonding to substrates. The primary amine function reacts with a wide array of thermoset, thermoplastic and elastomeric materials. Silquest A-1100 silane has the following structural formula:



### Potential Applications

#### Coatings, Adhesives and Sealants

This amino silane is an excellent adhesion promoter in acrylic coatings, adhesives and sealants. With polysulfide, urethane, RTV silicones, epoxy, nitrile, and phenolic adhesives and sealants, the product improves pigment dispersion and maximizes adhesion to glass, aluminum, steel and various other substrates.

#### Glass-Reinforced Resin Systems

In glass-reinforced thermosets, Silquest A-1100 silane enhances the flexural, compressive and interlaminar shear strengths before and after exposure to humidity. This product greatly improves wet electrical properties. Glass-reinforced thermoplastics, polyamides, polyesters and polycarbonates exhibit

increased flexural and tensile strengths before and after wet exposure when this silane is used.

### Glass Fiber and Mineral Wool Insulation

As a phenolic resin binder additive, Silquest A-1100 silane imparts moisture resistance and allows recovery after compression.

### Mineral-Filled Resin Systems

Silquest A-1100 silane maximizes the physical and electrical properties of mineral-filled phenolics, epoxies, polyamides, polybutylene terephthalate and a host of other thermoset and thermoplastic composites. Filler wetting and dispersibility in the polymer matrix are also improved.

### Foundry Applications

In shell molding, this silane strengthens the bond between the phenolic binder and foundry sand.

### Grinding Wheels

The product promotes an improved, water-resistant bond between the abrasive grit and phenolic resin binder.


### Solubility

Many of the potential applications for Silquest A-1100 silane require complete solubilization without the formation of finely dispersed particles. These particles appear as a haze when dispersed in water. Our unique process and carefully controlled process conditions typically produce Silquest A-1100 silane that minimize the amount of haze that is often found in competitors' products.

Figure 1 illustrates the very low levels of haze of Silquest A-1100 silane, as measured by Hach number, when compared with Chinese and European competitors' products. Hach number, a typical measurement of the amount of dispersed particles in the water solution of the silane, is a quantitative measurement of the haze of the aqueous silane solution. Our upper specification limit (USL) for Hach number is less than or equal to 3.

Silquest A-1100 silane is completely and immediately soluble in water (with reaction), alcohol and aromatic and aliphatic hydrocarbons. Ketones are not recommended as diluents. Hydrolysis is noticeably exothermic and releases ethanol.

**Figure 1. The Hach numbers of aqueous solutions Silquest A-1100 silane and several competitive aminosilane offerings**

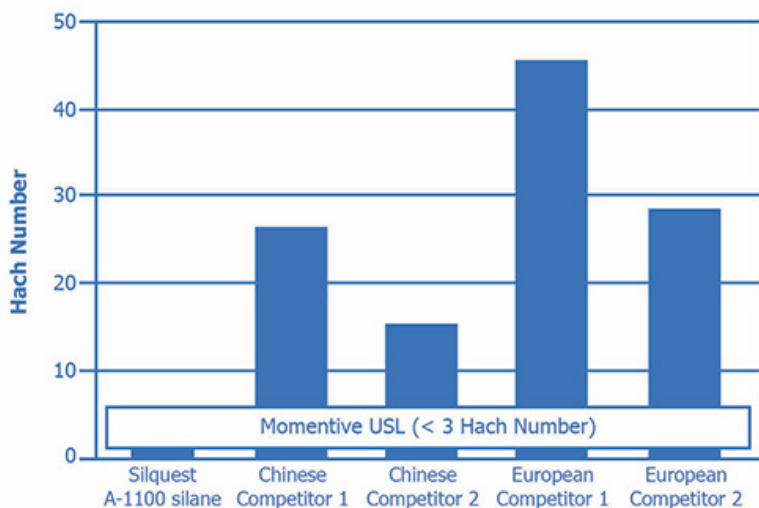

Note: Test data. Actual results may vary.

\*Silquest A-1100 is a trademark of Momentive Performance Materials Inc.

### Patent Status

Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

## Product Safety, Handling and Storage

Customers should review the latest Material Safety Data Sheet (MSDS) and label for product safety information, safe handling instructions, personal protective equipment if necessary, and any special storage conditions required for safety. MSDS are available at [www.momentive.com](http://www.momentive.com) or, upon request, from any Momentive Performance Materials (MPM) representative. **For product storage and handling procedures to maintain the product quality within our stated specifications, please review Certificates of Analysis, which are available in the Order Center.** Use of other materials in conjunction with MPM products (for example, primers) may require additional precautions. Please review and follow the safety information provided by the manufacturer of such other materials.

## Limitations

Customers must evaluate Momentive Performance Materials products and make their own determination as to fitness of use in their particular applications.

From automotive to healthcare, from electronics to construction, products from Momentive Performance Materials Inc. are practically everywhere you look. We are a global leader in silicones and advanced materials with a 70+ year heritage of innovation and being first to market – with performance applications that improve everyday life. By knowing our customers' needs and creating custom technology platforms for them, we provide science based solutions to help customers increase performance, solve product development issues and engineer better manufacturing processes.

### Contact Information

For product prices, availability, or order placement, contact our customer service by visiting [www.momentive.com/Contacts](http://www.momentive.com/Contacts)

For literature and technical assistance, visit our website at: [www.momentive.com](http://www.momentive.com)

**Momentive and the Momentive logo are trademarks of Momentive Performance Materials Inc.**

**\*Silquest is a trademark of Momentive Performance Materials Inc.**

### DISCLAIMER

The information provided herein was believed by Momentive Performance Materials Inc. (collectively with its subsidiaries, "Momentive") to be accurate at the time of preparation or prepared from sources believed to be reliable, but it is the responsibility of the user to investigate and understand other pertinent sources of information, to comply with all laws and procedures applicable to the safe handling and use of the product, and to determine the suitability of the product for user's intended application or use. All products supplied by Momentive are subject to Momentive's standard terms and conditions of sale. **MOMENTIVE MAKES NO WARRANTY, EXPRESS OR IMPLIED, CONCERNING THE PRODUCT OR THE MERCHANTABILITY OR FITNESS THEREOF FOR ANY PURPOSE OR CONCERNING THE ACCURACY OF ANY INFORMATION PROVIDED BY MOMENTIVE**, except that the product shall conform to Momentive's specifications. Nothing contained herein constitutes an offer for the sale of any products.