



BASF

We create chemistry

ACRONAL[®] 4888

High-strength styrene-acrylic binder for polyester nonwovens

Key features & benefits

- Water-based self-crosslinking binder
- Good adhesion to polyester and glass fibers
- High heat resistance
- Outstanding thermal dimensional stability

Applications

- Ideally suited for use in commercial roofing applications
- Excellent binder for polyester nonwovens, including recycled polyethylene terephthalate (PET)




ACRONAL 4888

High-strength styrene-acrylic binder for polyester nonwovens

ACRONAL 4888 is a self-crosslinking styrene-acrylic binder that contains acrylonitrile and is used to bring strength to nonwovens used in commercial roofing applications. The unique properties of ACRONAL 4888 are crucial when working with polyester nonwovens, especially when producing asphalt shingles and build-up roof (BUR) membranes that require binding strength, flexibility, and the ability to stand up to hot asphalt. ACRONAL 4888 provides excellent adhesion to polyester and glass fibers, high heat resistance, and outstanding thermal dimensional stability.

	Polymer	Solids (wt. %)	pH	Tg	Viscosity	Hydrophobicity
ACRONAL 4888	Styrene-acrylic	~49	8	31	100-600	Yes

Thermodimensional Stability - Hot Tensile 180°C

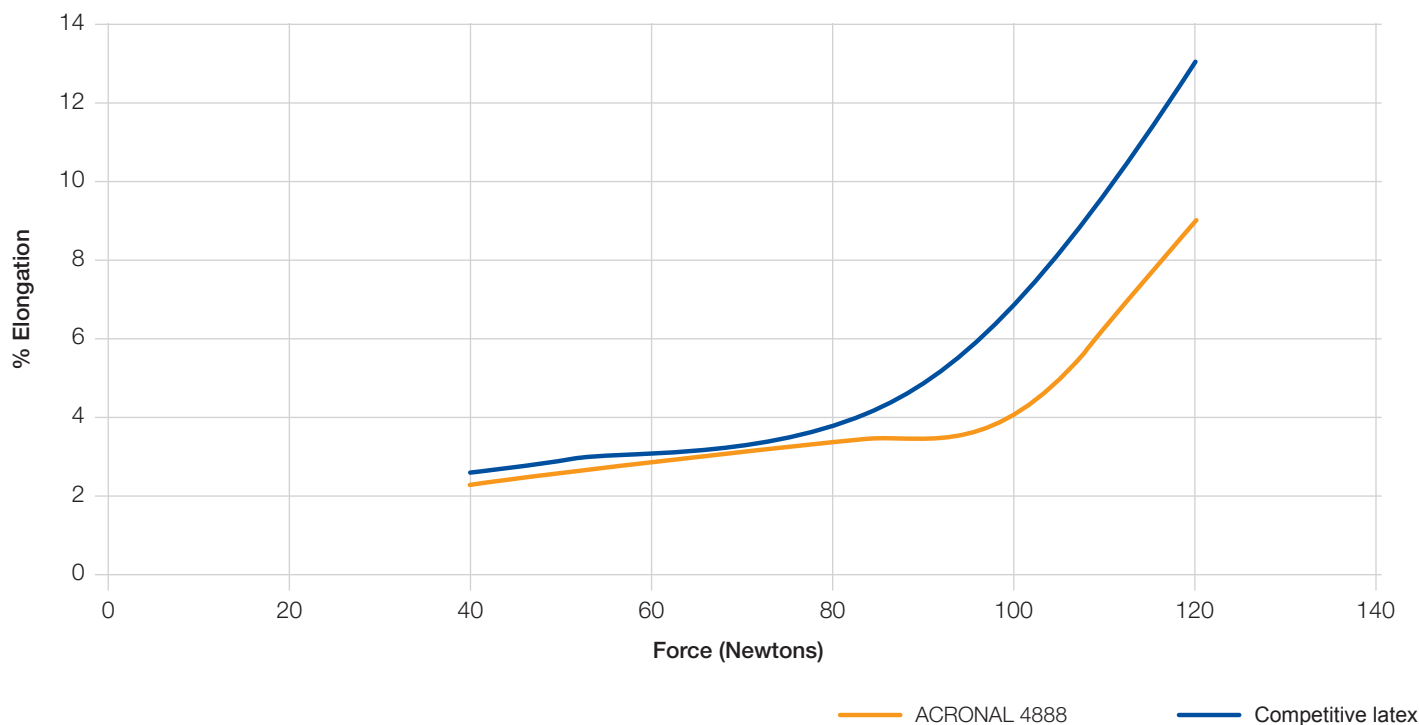

Contacts

Please contact us to learn more about ACRONAL 4888 and our full portfolio of construction solutions.

United States and Canada

BASF Corporation
11501 Steele Creek Road
Charlotte, NC 28273
Phone: 800-251-0612
E-mail: dpsolutions@basf.com
Web: www.basf.us/ConstructionSolutions

Mexico

BASF Mexicana, S.A. de C.V. Av. Insurgentes Sur 975
Col. Ciudad de los Deportes 03710
Mexico, D.F.
Phone: 52-55-5325-2600
E-mail: contactoed@basf.com
Web: www.basf.com.mx

BASF Corporation, 2019. Charlotte, NC.

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (01/2019)

® = Registered trademark of the BASF Group