

Industrial Coatings

Technical Data Sheet



Joncryl[®] 901 Polyol

Product Description	Joncryl [®] 901 is an acrylic polyol for high solids urethane coating applications.
Key Features & Benefits	<ul style="list-style-type: none">- Excellent gloss retention- Fast dry- Long pot life
Chemical Composition	Acrylic polyol

Properties

Typical Properties	Appearance	clear liquid
	Non-volatile at 150°C (0.5g, 60 minutes)	~ 77%
	Hydroxyl number of solids	~ 112
	Viscosity at 25.0 ± 0.5°C (Brookfield #4 LV, 30 rpm, 30 seconds)	10,000 – 25,000 cP
	Density at 20°C	~ 1.07 g/cm ³ (8.9 lbs/gal)
	Equivalent weight as supplied, of solids	~ 650, 500
	T _g	~ 20°C
	Solvent	Methyl n-amy ketone

These typical values should not be interpreted as specifications.

Applications


Joncryl[®] 901 is an innovative acrylic oligomer for high solids polyurethane coatings. High solids coatings containing as low as 3.2 pounds per gallon of VOC (Volatile Organic Compounds) can be formulated to spray by conventional or airless equipment. Joncryl[®] 901 displays excellent viscosity characteristics without the addition of low molecular weight reactive diluents. Paints formulated with Joncryl[®] 901 should be considered as a candidate for high performance maintenance and transportation coatings as a replacement for conventional solids urethane finishes.

Joncryl[®] 901 is recommended for applications such as:

- Interior/exterior general metal coating applications
- Automotive refinish applications


QUV Gloss Retention	When formulated into a white topcoat formulation, Joncryl [®] 901 offers superior QUV gloss retention when compared to other systems of similar viscosity/VOC. QUV gloss retention results were obtained using UVB-313 bulbs with 4 hours of light at 60°C followed by 4 hours of condensation at 40°C. Both coatings are white topcoat formulations at 2.8 lbs/gal VOC, 17% PVC, with Basonat [®] HI 100 as the crosslinker. The coatings are catalyzed with 0.005% dibutyltin dilaurate. No UV stabilizers were utilized.
----------------------------	---

QUV Gloss Retention

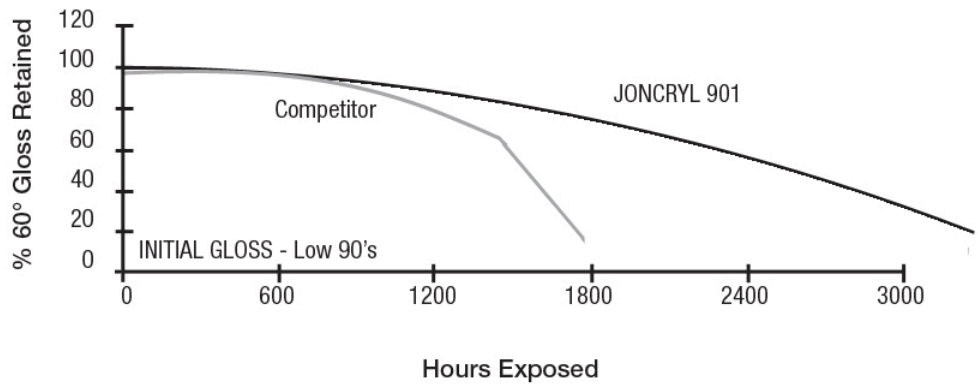


South Florida Weathering

The following graph demonstrates the 60° gloss retention of polyurethane coating formulations based on Joncryl® 901 in South Florida weathering (ASTM G7-05). No UV stabilizers were used.

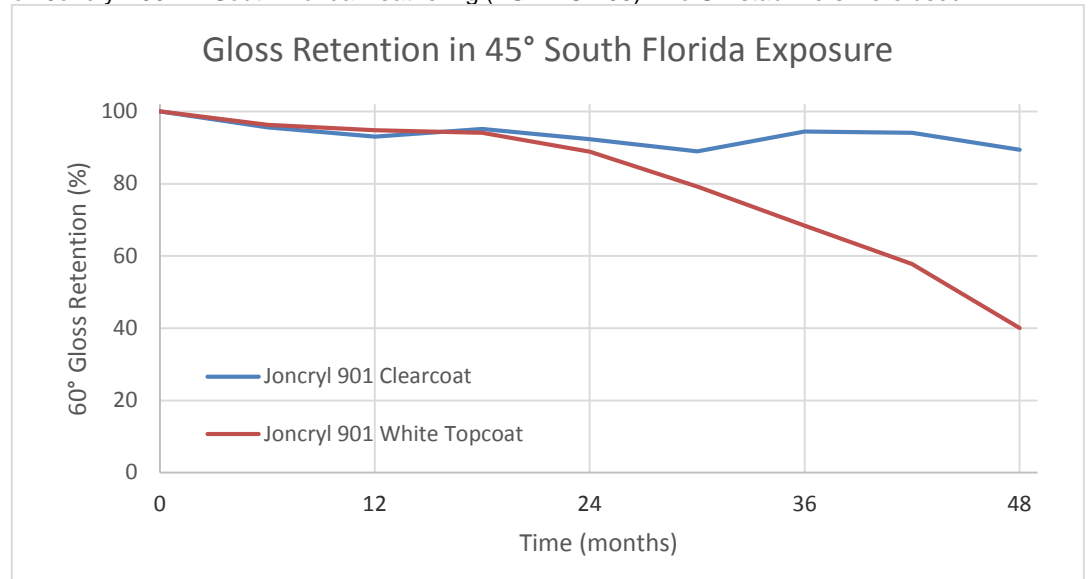

Cure/Dry Characteristics

The following graph illustrates the dry times/cure rates of a white topcoat formulation based on Joncryl® 901. Evaluations of Gardner dry times are very subjective. The dry times will normally lie somewhere within the area plotted on the chart. The pot life of this system will normally be between 4 – 6 hours when pot life is defined as the time to double an initial viscosity of 250 cP.

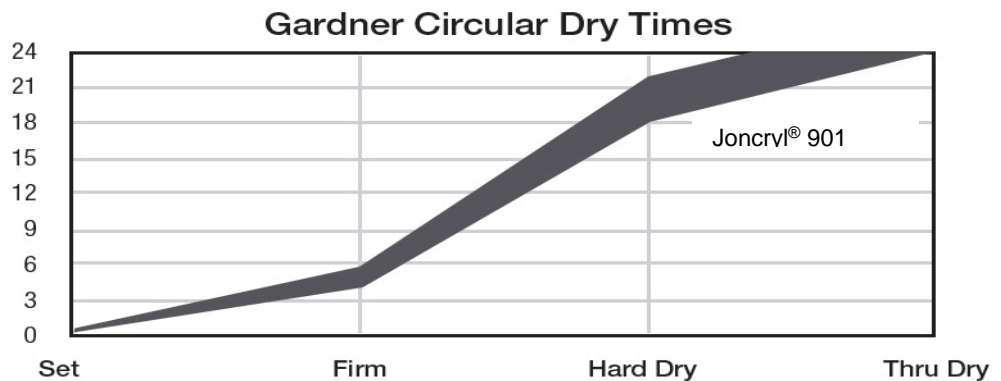

Formulation Guidelines

Crosslinker Selection – For maximum gloss retention properties, aliphatic isocyanates are recommended. The isocyanurate (trimer) or biuret versions of hexamethylene diisocyanate can be used. The trimer version gives better gloss retention and reactivity. A ratio of 1.05:1 of isocyanate to hydroxyl is normally recommended in the industry. However, a ratio of 1:1 of isocyanate to hydroxyl is more economical and does not sacrifice performance properties.

Solvent Selection – Because the hydroxyl functionality of alcohols and glycol ethers can react with the isocyanates, their use should be avoided. Urethane-grade solvents should be used when available. Ketones will give the best viscosity/VOC due to a combination of good solvency and low density. Esters are the next best choice although they do not provide as low a viscosity/VOC as ketones due to their higher density. Generally, the lower the molecular weight of the solvent within the family, the lower the obtainable viscosity/VOC. Aromatics such as xylene and toluene provide good solvency and can be readily used in combination with the more polar solvents. Toluene provides for especially low viscosity/VOC. Glycol ether acetates can be used but normally do not provide a low viscosity/VOC. PM acetate exhibits film retention characteristics.

Catalysis – Catalysis with 0.005% dibutyltin dilaurate on total binder solids is normally recommended. Higher catalyst levels will result in shorter pot lives and faster cure rates. Other catalysts such as zinc octoate and other metallic soaps can also be used.

Additives – Efka® FL 3670 results in excellent flow and leveling. If a dispersant is necessary, Lecithin or Disparlon¹ KS-273N is recommended. For higher film build, thixotropes such as bentonite clays, fumed silicas, or organic additives such as Thixatrol² can be used.

¹Registered trademark of King Industries, Inc.

²Registered trademark of Elementis Specialties, Inc.

Starting Point Formulation

The following starting point formulation is recommended for an initial evaluation of Joncryl® 901. Additional optimization of the formulation may be required to achieve desired results for specific applications.

Joncryl® 901 ACRYLIC/URETHANE GLOSS WHITE TOPCOAT, Formula 137-AA

Part A	Pounds	Gallons
Joncryl® 901	211.82	23.80
Efka® FL 3670	2.29	0.28
MAK	39.58	5.84
Add while mixing:		
Ti-Pure ³ R-960	321.03	9.97
Disperse to 6 – 7 Hegman, then add:		
Joncryl® 901	240.57	27.03
MAK	131.72	19.37
10% DBTDL in MAK	0.20	0.03
Subtotal	947.21	86.32
Part B		
Basonat® HI 100	133.11	13.68
Total	1,080.32	100.00

Formulation Attributes

Solids	74.4% by wt, 59.0% by volume
Viscosity (Brookfield)	325 cP
PVC	17%
Pigment:Binder ratio	0.67
NCO:OH ratio	1:1
VOC (calculated)	2.76 lbs/gal, 331.3 g/l

Coating Physical Properties and Chemical Resistance:

The following table displays the physical properties and chemical resistance of Joncryl® 901 White Topcoat, Formula 137-AA:

Gloss, 60°, 20°	97, 90
Pencil hardness	H
König hardness	106
Direct impact	38 in/lbs
Reverse impact	8 in/lbs
Acid resistance	8
Caustic resistance	9
Solvent resistance	9

Acid, caustic, and solvent resistances are rated on a scale of 1-10, with 10 equal to no effect after a 24-hour spot test.

³Registered trademark of The Chemours Company.

Safety

General

The usual safety precautions when handling chemicals must be observed. These include the measures described in Federal, State, and Local health and safety regulations, thorough ventilation of the workplace, good skin care, and wearing of personal protective equipment.

Safety Data Sheet

All safety information is provided in the Safety Data Sheet for Joncryl® 901.

Important

While the descriptions, designs, data and information contained herein are presented in good faith and believed to be accurate, they are provided for guidance only. Because many factors may affect processing or application/use, BASF recommends that the reader make tests to determine the suitability of a product for a particular purpose prior to use. **NO WARRANTIES OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARE MADE REGARDING PRODUCTS DESCRIBED OR DESIGNS, DATA OR INFORMATION SET FORTH, OR THAT THE PRODUCTS, DESCRIPTIONS, DESIGNS, DATA OR INFORMATION MAY BE USED WITHOUT INFRINGING THE INTELLECTUAL PROPERTY RIGHTS OF OTHERS.** In no case shall the descriptions, information, data or designs provided be considered a part of BASF's terms and conditions of sale. Further, the descriptions, designs, data, and information furnished by BASF hereunder are given gratis and BASF assumes no obligation or liability for the descriptions, designs, data or information given or results obtained all such being given and accepted at the reader's risk.

Basonat, Efka, and Joncryl are registered trademarks of BASF Group.

© BASF Corporation, 2017



BASF Corporation is fully committed to the Responsible Care® initiative in the USA, Canada, and Mexico.

For more information on Responsible Care® go to:

U.S.: www.basf.us/responsiblecare_usa

Canada: www.basf.us/responsiblecare_canada

México: www.basf.us/responsiblecare_mexico

U.S & Canada

BASF Corporation
24710 W Eleven Mile Road
Southfield, MI 48034

ph: 1(800) 231-7868

fax:1(800) 392-7429

Email: DispersionsPigmentsCC@basf.com

Email: edtech-info@basf.com

www.basf.us/dpsolutions

Mexico

BASF Mexicana, S.A. de C.V.

Av. Insurgentes Sur # 975

Col. Ciudad de los Deportes

C.P. 03710

Mexico, D.F.

Phone: (52-55) 5325-2756

Fax: (52-55) 5723-3011