

Joncryl[®] HPB 4000 & Joncryl HPB 4020 Heat Sealable, Liquid Barrier polymers

Performance benefits

- May be formulated into water-based barrier coatings with similar properties as extruded PE
- Heat-sealable, block-resistant, liquid barrier with food contact approval for paperboard packaging
- Wet block resistance for high humidity conditions

Sustainability benefits

- Confirmed repulpable and recyclable by in-house laboratory testing.
- Enables barrier and heat seal performance with repulpability
- Provides an option to minimize waste in converting processes




Multiple liquid barrier applications for hot and cold cups

Joncryl HPB 4000 & Joncryl HPB 4020

Heat-sealable barrier coatings for paperboard packaging

Joncryl HPB 4000 is a primer designed for use with Joncryl HPB 4020 topcoat binder. After formulating, the primer / topcoat system provides a highly water-resistant, heat-sealable coatings with good block resistance for use on paperboard packaging.

Comparison of 2-layer Joncryl HPB coating system to extruded polyethylene

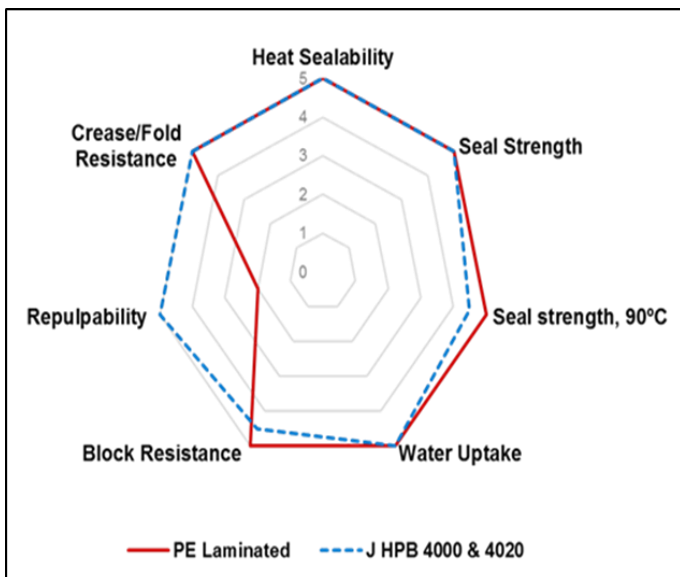

Starting point formulas and performance

For end uses requiring excellent water resistance (20 minute Cobb < 2.0 g/m²) and block resistance:

1 st layer	
Joncryl HPB 4000	99.7%
Sterocoll FS na	0.2%
Defoamer	0.1%
Water	As needed for application viscosity
Target dry coating weight: 8 gsm	
2 nd layer	
Joncryl HPB 4020	84.4%
Joncryl DFC 3025	5.0%
Joncryl DFC 3050	10.0%
Sterocoll FS na	0.5%
Defoamer	0.1%
Water	As needed for application viscosity
Target dry coating weight: 5 gsm	

Enables sustainable packaging with barrier and heat seal

- Good barrier and heat seal properties, while still repulpable
- Flexibility in application methods (e.g. rod, gravure)
- Suitable for a wide range of packaging
- Wet block resistance for high humidity conditions

Contacts

Please contact our technical service department for more help on formulating with products from the Joncryl product line.

Asia
China
Phone: +852 2731-0111
dispersions-pigments-asia@basf.com

Europe, Africa, West Asia
Netherlands
Phone: +31 513 619-619
resins@basf.com

North America
USA
Phone: +1 800 231-7868
dpsolutions@basf.com
www.basf.us/dpsolutions

South America
Brazil
Phone: +55 11 2039-2300
packaging-sa@basf.com

BASF Corporation, Charlotte, NC

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed. (01/2018)

® = Registered trademark of the BASF Group