


Loxanol® OT 5853



VOC-free open time prolonger for plasters with excellent cold storage stability

Loxanol® OT 5853 is an additive to prolong the 'open time' and workability of latex-based plasters for exterior insulation and finishing systems (EIFS) with high active content and improved cold storage stability. Loxanol® OT 5853 provides apparent elasticity whereby cracks in plasters are avoided to a large extent and additionally it helps minimizing pores on the surface of the plaster.

Improved cold storage stability

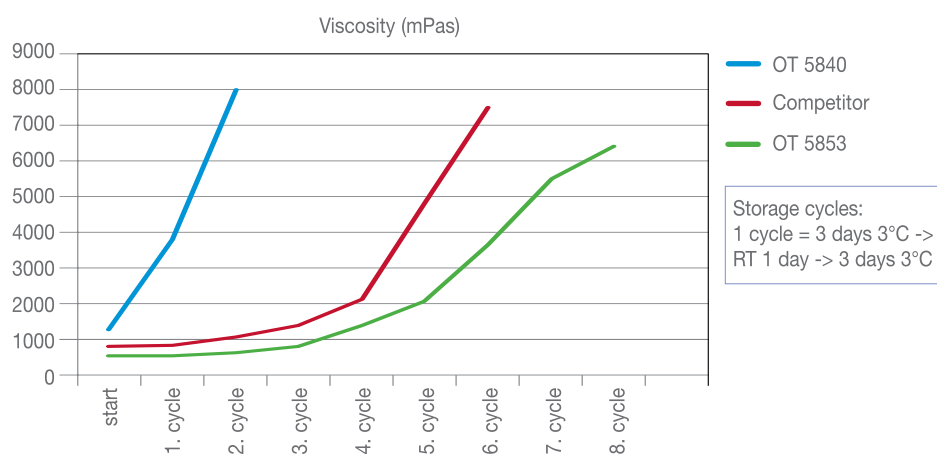

Performance Highlights

- Improved cold storage stability
- Improved handling (reduced product viscosity (~ 1,000 mPas) at high concentration level (30% active))
- Minimization of pore building

Sustainability Highlights

- VOC-free according to EU 2004/42 method
- APEO free
- Low odor
- Suitable for achieving the European Ecolabel for "indoor paints and varnishes" 2009/544/EC and for "outdoor paints and varnishes" 2009/543/EC for the final paint

Reduction of crack formation by using open time prolongers



Loxanol® OT 5853: Characteristic Values

Property	Value
Appearance	white viscous liquid
Solids	~ 30%
Viscosity	1000 mPas
Density	~ 0.97 g/cm ³
VOC	< 0.1% acc. To EU 2004/42 (b.p. > 250°C)



Contacts worldwide

Asia

BASF East Asia Regional Headquarters Ltd.
45/F., Jardine House
No. 1 Connaught Place
Central
Hong Kong
formulation-additives-asia@basf.com

Europe

BASF SE
Formulation Additives
67056 Ludwigshafen
Germany
formulation-additives-europe@basf.com

North America

BASF Corporation
11501 Steel Creek Road
Charlotte, NC 28273
USA
formulation-additives-nafta@basf.com

South America

BASF S.A.
Av. Faria Lima 3600 - 10º andar
Itaim Bibi - São Paulo - SP
04538-132
Brazil
formulation-additives-south-america@basf.com

www.basf.com/formulation-additives

The data contained in this publication are based on our current knowledge and experience. In view of the many factors that may affect processing and application of our product, these data do not relieve processors from carrying out their own investigations and tests; neither do these data imply any guarantee of certain properties, nor the suitability of the product for a specific purpose. Any descriptions, drawings, photographs, data, proportions, weights etc. given herein may change without prior information and do not constitute the agreed contractual quality of the product. The agreed contractual quality of the product results exclusively from the statements made in the product specification. It is the responsibility of the recipient of our products to ensure that any proprietary rights and existing laws and legislation are observed. When handling these products, advice and information given in the safety data sheet must be complied with. Further, protective and workplace hygiene measures adequate for handling chemicals must be observed.